


Bead Bash!


Step 1:

To make a bracelet, cut an 8-inch piece of elastic. For a ring, cut a 5-inch piece. Tie a knot an inch away from one end of the elastic. Straighten out the beading needle, and thread the un-knotted end of the elastic through the hole in the beading needle.

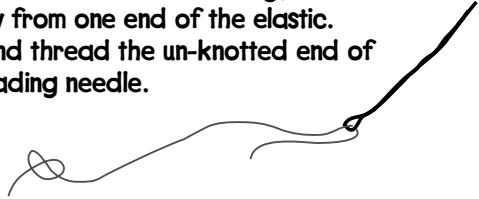


Step 2:

Begin beading your bracelet or ring with metal and glass beads, and continue until you've beaded enough to cover your wrist or finger.

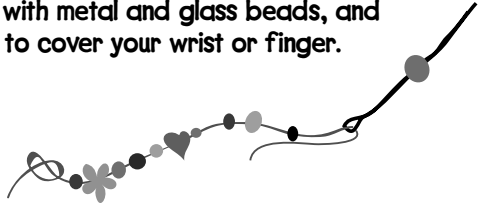

Step 3:

Now tie the two ends together and knot 3 times. Snip off the extra elastic and hide the knot under a bead.



Helpful Hints:

You can use a dot of clear nail polish or glue to secure your final knot. Just wait until it dries before you cut off the extra elastic.